

ABOUT AA THREAD

AA Thread has been in business for 30 years supplying wholesalers and distributors in the plumbing and water/wastewater industry with quality products and superior service. Our friendly customer service can help with technical information and tailor pricing to meet your volume requirements. Over the years, we have grown to be one of the largest distributors in North America.

We go out of our way to ensure that every product meets or exceeds all regulatory specifications. Consistent product quality combined with responsive technical and customer service provide the perfect fit for your pipe wrapping, plumbing, and other industrial applications.

RAPID SHIP PROGRAM

We keep a vast inventory of our products in stock. This gives us the opportunity to offer our Rapid Ship Program. Orders received before 10am (CST) will be shipped that same day. This applies to all products that are regular stocked items. Special order items are subject to lead times.



AA Thread Seal Tape, Inc.

1275 Kyle Court
Wauconda, IL 60084

Phone: (847) 526-2120
Toll Free: (800) 537-7139
Fax: (847) 526-2209

www.aathread.com
sales@aathread.com

Members Of:



www.aathread.com
(847) 526-2120

10 MIL CROSS LAMINATED HIGH DENSITY POLYETHYLENE JOINT WRAP



**ULTIMATE CORROSION PROTECTION
FOR ALL MECHANICAL JOINTS**

ABOUT OUR JOINT WRAP

- Made of 10 MIL Cross Laminated High Density Polyethylene
- Strongest Protection available against punctures and tears where they are most likely to happen due to sharp metal from sheared heads
- Exceeds ANSI/AWWA C105/A21.5 minimum requirements for thickness, elongation, and impact resistance
- 2 1/2 times thicker than 4 MIL HDPE material used for Ductile Iron Pipe
- Made from 100% virgin High Density Polyethylene resins that are stretched in machine and transverse directions, then laminated with their grain orientations in opposite directions
- Easy to install

AVAILABLE IN:

Standard Roll Sizes

20" X 100'

30" X 100'

*Spiral wrap around joint, tape to secure.



Pre-manufactured Joint Wrap Tubes

Available for 6" to 24" Mechanical Joints


*Slip over joint, tape to secure

PROPERTIES OF AA THREAD'S NEW JOINT WRAP

Test	C105/A21.5 Min. Req.	AA Thread's Material
Thickness	4 MIL or 101 gsm	10.5 MIL or 250 gsm
Elongation	100% (D882 MD & TD)	MD- 800% TD- 800%
Impact Resistance	800 grams (ASTM D1709)	1,000 grams
Propagation Tear Resistance	N/A (D2582 MD & TD)	MD- 15,000g TD- 15,000g

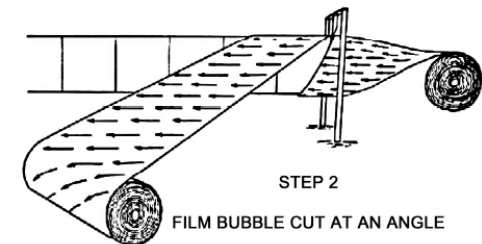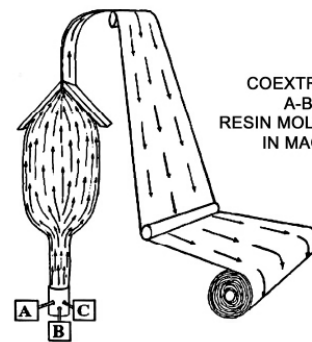

CROSS LAMINATING PROCESS

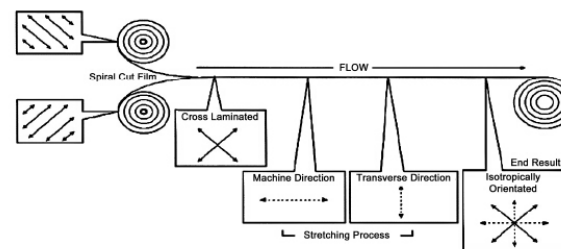

STEP 3
TWO LAYERS OF THE
SPIRAL CUT FILMS, WITH
ORIENTATIONS AT OPPOSITE
ANGLES, ARE LAMINATED TOGETHER